


FASE INICIO: Conmutación polaridad EB1RL - 20mar'10

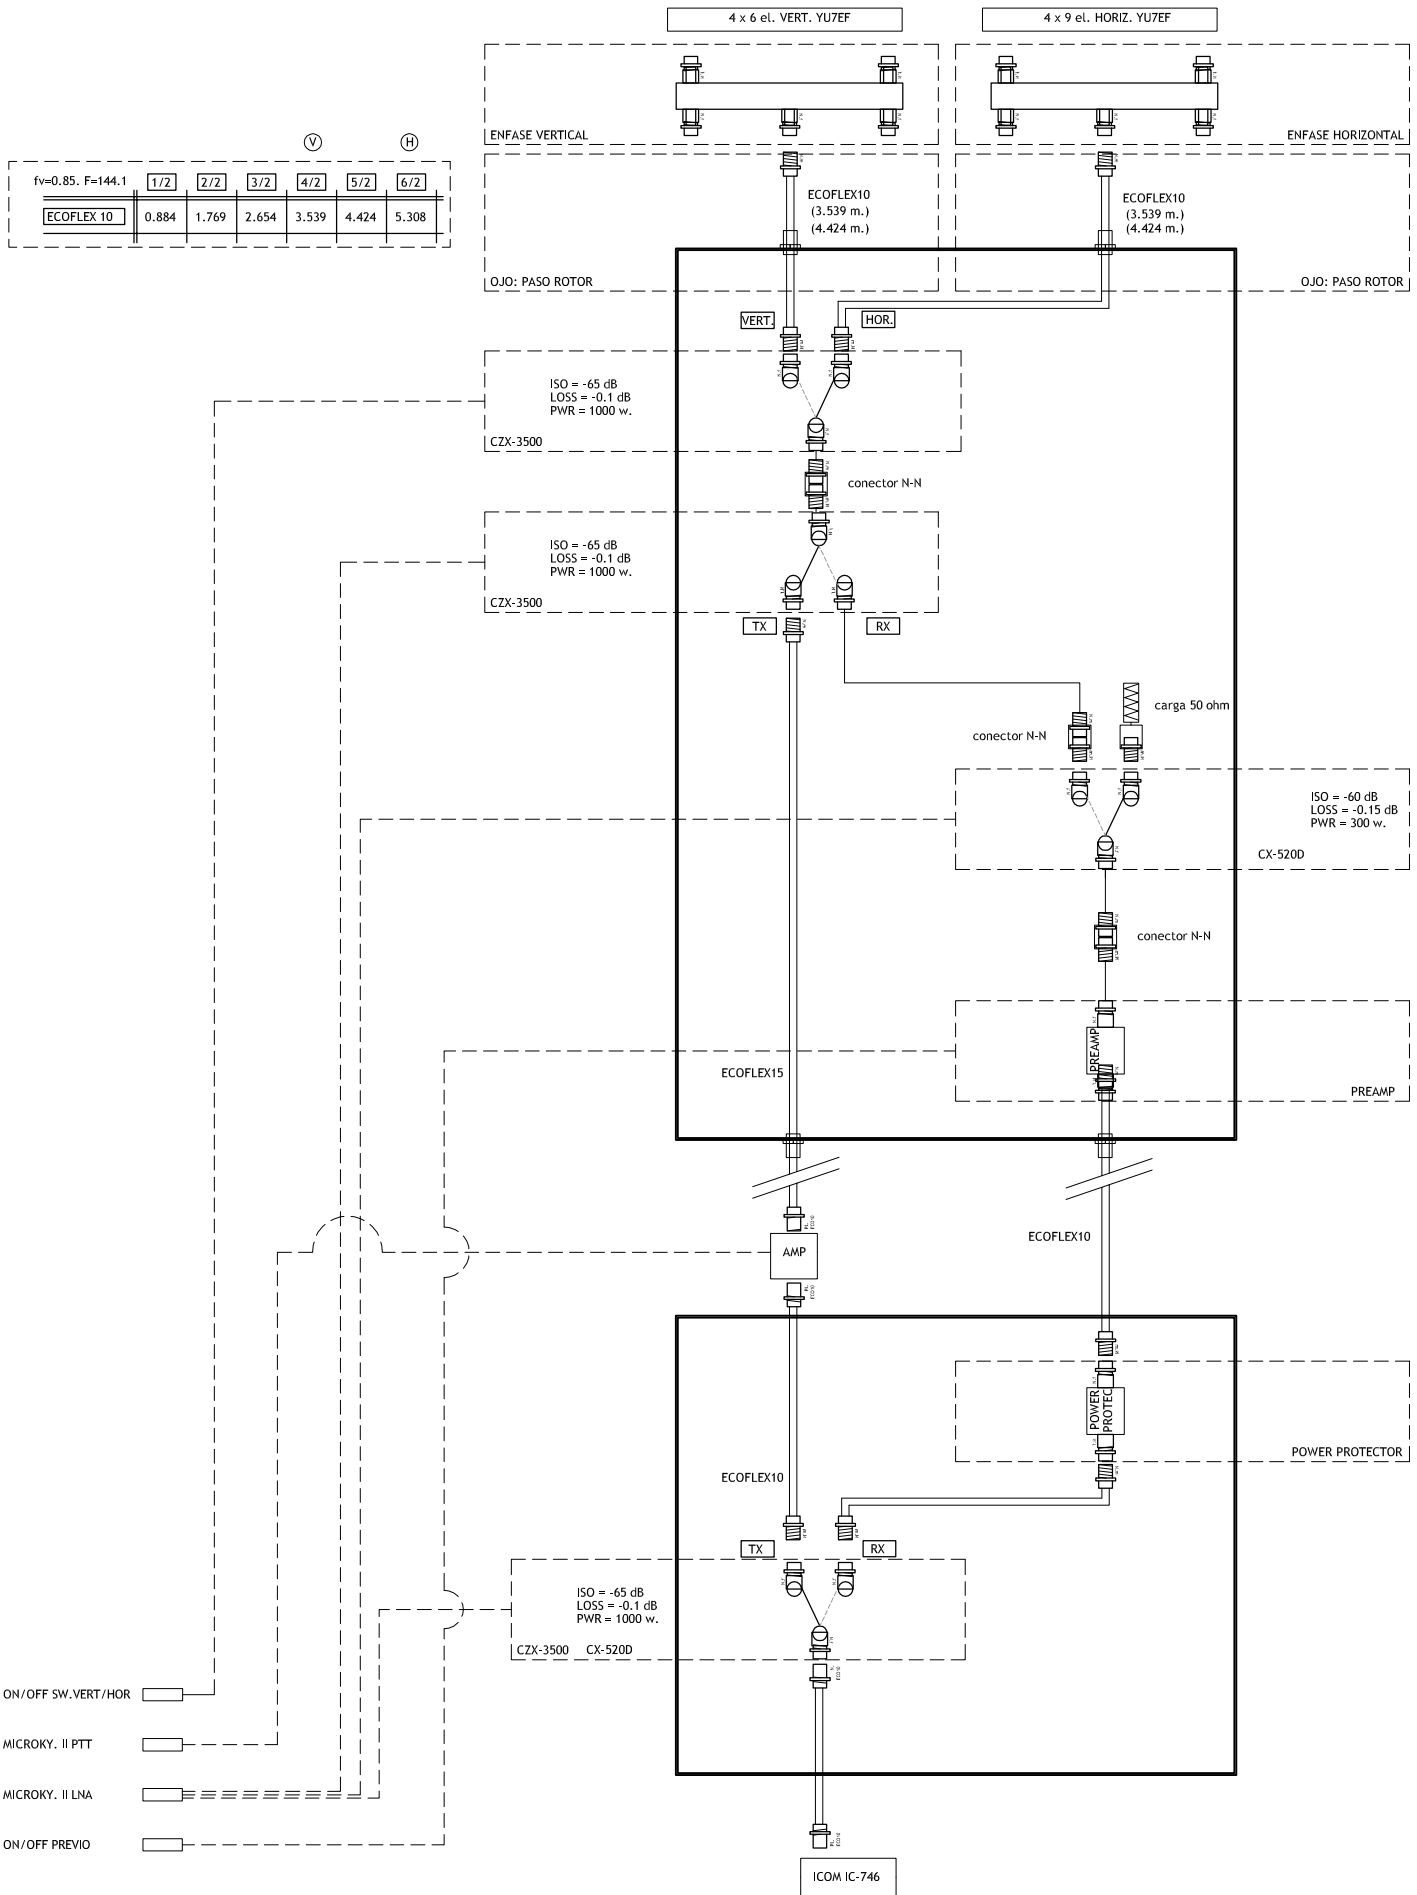

fv=0.85. F=144.1

	1/2	2/2	3/2	4/2	5/2	6/2
ECOFLEX 10	0.884	1.769	2.654	3.539	4.424	5.308

- +12v. ON/OFF SW.VERT/HOR
- +12v. MICROKY. II PTT
- +12v. MICROKY. II LNA
- +12v. ON/OFF PREVIO